



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁴ : A61B 5/10		A1	(11) International Publication Number: WO 88/ 04153 (43) International Publication Date: 16 June 1988 (16.06.88)
(21) International Application Number: PCT/GB87/00863 (22) International Filing Date: 2 December 1987 (02.12.87) (31) Priority Application Number: 8628709 (32) Priority Date: 2 December 1986 (02.12.86) (33) Priority Country: GB (71) Applicant (for all designated States except US): KODAK LIMITED [GB/GB]; P.O. Box 66, Station Road, Hemel Hempstead, Hertfordshire HP1 1JU (GB). (72) Inventor; and (75) Inventor/Applicant (for US only) : GREEN, Andrew [GB/GB]; 36 Kings Way, Harrow, Middlesex (GB). (74) Agent: DAVIS, Ian, E.; Kodak Limited, Headstone Drive, Harrow, Middlesex HA1 4TY (GB).			(81) Designated States: AT (European patent), AU, BE (European patent), CH (European patent), DE (European patent), DK, FI, FR (European patent), GB (European patent), IT (European patent), JP, KR, LU (European patent), NL (European patent), NO, SE (European patent), US. Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: INFORMATION CONCERNED WITH THE BODY OF AN INDIVIDUAL			
(57) Abstract Identification of an individual by forming an image of a selected portion of the body of the individual, extracting information, such as that which relates to the pattern of subcutaneous blood vessels, from said image and comparing said information with predetermined information.			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT Austria
AU Australia
BB Barbados
BE Belgium
BG Bulgaria
BJ Benin
BR Brazil
CF Central African Republic
CG Congo
CH Switzerland
CM Cameroon
DE Germany, Federal Republic of
DK Denmark
FI Finland

FR France
GA Gabon
GB United Kingdom
HU Hungary
IT Italy
JP Japan
KP Democratic People's Republic
of Korea
KR Republic of Korea
LI Liechtenstein
LK Sri Lanka
LU Luxembourg
MC Monaco
MG Madagascar

ML Mali
MR Mauritania
MW Malawi
NL Netherlands
NO Norway
RO Romania
SD Sudan
SE Sweden
SN Senegal
SU Soviet Union
TD Chad
TG Togo
US United States of America

INFORMATION CONCERNED WITH THE
BODY OF AN INDIVIDUAL

The present invention relates to information concerned with the body of an individual. It relates particularly to the identification of individuals and more particularly to obtaining information regarding a portion of the body of an individual and comparing that information with predetermined information regarding that portion.

10 GB-A-2156127 describes an arrangement in which the arrangement of subcutaneous blood vessels in an individual is detected by scanning the relevant region of the individual's body and then compared with a predetermined pattern. In GB-A-2156127, a number of
15 methods of locating such blood vessels are disclosed, all of which methods involve physical contact between the sensor and the skin of the individual in question.

GB-A-1593001 describes the identification of individuals through their retinal vasculature
20 patterns. However, this requires the individual to place his eyes in an apparatus for scanning. Although it is suggested that each retinal image is unique to an individual, the necessity of placing one's eyes in a scanning apparatus could be socially unacceptable to
25 many individuals.

US-A-4032889 discloses a palm print identification system, but here also a scanning probe is in contact with the individual's palm.

In all of these prior art disclosures, the
30 techniques both utilise a scanning procedure to obtain measurements and also require the individual to be subjected to a procedure which could be socially unacceptable.

In accordance with the present invention
35 there is provided apparatus for identifying an individual comprising means for forming an image of a selected portion of the body of the individual, means

for extracting information from said image and means for comparing said information with predetermined information.

5 The information extracted from said image by said apparatus preferably, but not exclusively, relates to the pattern of subcutaneous blood vessels.

The selected portion is preferably a hand and the subcutaneous blood vessels are veins in said hand.

10 In accordance with the present invention there is also provided apparatus for measuring a vein pattern of an individual comprising means for forming an image of a selected portion of the body of the individual and means for extracting information from said image.

15 According to the present invention the means for forming an image preferably comprises camera means spaced from said selected portion.

The means for extracting information preferably converts information in said image into
20 electrical form.

In accordance with the present invention there is further provided a method of identifying an individual comprising the steps of forming an image of a selected portion of the body of the individual,
25 extracting information from said image and comparing said information with predetermined information.

The information extracted from said image by said method preferably, but not exclusively, relates to the pattern of subcutaneous blood vessels.

30 The selected portion used in said method is preferably a hand and the subcutaneous blood vessels are veins in said hand.

In accordance with the present invention there is further provided a method of measuring a vein
35 pattern of an individual comprising the steps of forming an image of a selected portion of the body of the individual and extracting information from said

image.

In such methods, said image is formed preferably by camera means spaced from said selected portion.

5 In such methods, said information extracted from said image is preferably converted into electrical form.

In the apparatus and methods of the present invention the electrical form is preferably digital.

10 In the apparatus and methods of the present invention, infra-red radiation is preferably used for illuminating said selected portion.

Furthermore, said selected portion is preferably located in a predetermined position and
15 orientation whilst the image is being formed.

In the apparatus and methods of the present invention a charge-coupled device array is preferably used in forming said image.

The present invention will now be described
20 by way of example with reference to the accompanying drawings, in which:-

FIGURE 1 is a perspective view of part of apparatus of the present invention showing the back of a hand of an individual in position for an image to be
25 produced;

FIGURE 2 shows a typical vein pattern recorded and displayed by the apparatus of the present invention;

FIGURE 3 shows the variation between a number
30 of vein scans made of the same hand at different times;

FIGURE 4 shows the comparison between scans of hands of different individuals; and

FIGURE 5 shows the distributions for (A) comparisons of the same individual, and (B) comparison
35 of different individuals, all based on samples from 30 individuals each measured on a number of different

occasions.

Although the following description relates to the vein pattern in the back of an individual's hand, it is emphasised that the present invention is not
5 limited to such an arrangement. For example, the vein pattern in the palm of a hand or any other suitable portion of the body could be utilised. Furthermore, the present invention could be applied to body features other than vein patterns. That is, any
10 suitable features of the body could be used, for example the line pattern in the palm of a hand, or external shape.

As shown in Figure 1, the right hand of an individual under test is located by first placing the
15 hand on a template 2 in the shape of a hand. The hand is then pushed forwards, in the general direction of an arrow X, until it is hard against a locator 4, and then rotated until it is also hard against a locator 6. At this point, the hand is in the correct position
20 and orientation for an exposure to be made to produce the required image.

The position and orientation is important to enable reproducibility of measurement to be obtained.

One or both of the locators A and B could be
25 movable laterally to allow for the size of a hand. Furthermore, one or both of the locators A and B could be provided with a built-in sensor (not shown) to indicate when the hand is properly in position.

The exposure is made using a camera 8 spaced
30 above the hand. The camera could alternatively be spaced below the hand, for example below a transparent screen upon which the hand is placed. With the hand in the same orientation as shown in Figure 1, obviously the vein pattern in the palm of the hand
35 would be measured. With this particular arrangement, the line pattern in the palm of the hand could in fact be measured. The camera could be positioned wherever

is considered suitable for a particular application, which would depend, for example, on the part of the individual's body that is being measured.

The camera 8 is based on an infra-red sensitive array, for instance a charge-coupled device (CCD), linked with a microprocessor or computer controller (not shown).

The camera 8 may conveniently be a commercial camera based on a 1024 element CCD array. For measurement of a vein pattern, only the central 512 elements are recorded and the image reduced as follows:

1) Each pair of elements are averaged, giving a total of 256.

2) A running average of each succeeding 8 bytes is calculated, i.e. bytes 0 to 7, bytes 1 to 8, bytes 2 to 9, etc.

3) Each block of eight bytes is averaged to a single byte, giving a final total of 32 bytes.

The camera could alternatively have only the number of elements required for final storage, so that averaging would be physical rather than mathematical.

Credit cards, bank cards, and similar cards currently have a 40 byte section of magnetic data storage available for future use. For this reason the vein pattern data has been reduced to no more than this level in total. Thus this biometric system is able to be operated using a very small amount of data for comparison.

In order to increase selectivity, the vein pattern may be measured at more than one, preferably two, positions on the rear of the hand. Each image would have data reduced to 20 bytes.

Automatic exposure level compensation is calculated by a controlling microprocessor system (not shown) and applied by means of a variable light source (not shown).

The final amplitude of the collected data is

expanded or compressed so that the minimum level is 0 and the maximum 128 on an arbitrary scale.

A microcomputer handles operation and synchronization of the camera 8, recording and storage of the data, and final manipulation of the data by the application of suitable algorithms. The data is recorded in the form of an image of the vein pattern and the algorithms are applied to the information in such image.

The algorithms compare vein pattern data and derive the statistical chances of two vein patterns being from the same individual, so that the operator of the system may set the levels of acceptance and rejection.

Vein patterns are compared by calculating the mean of the squares of the differences between images. The resulting quantity normally lies between 0 (for a perfect match) and about 80 (for a very bad match).

Verification or rejection of a particular individual is based on an assessment of the chances of whether a comparison of his vein pattern with one already recorded places him in distribution A or B in Figure 5.

If the system is to be applied to a group of individuals, in which it is known that no two individuals have the same vein patterns, i.e. all the vein patterns are distinctly different from one another, then the system could measure the vein pattern of an individual and establish by comparison with previously recorded vein patterns, the identity of that individual. This would of course only be effective if it is certain no individuals outside that group will be in a position such as to have their vein patterns scanned by the system.

However, in the vast majority of applications, such a group does not exist and such

identification is not possible. All that is possible is verification that an individual is probably who he claims to be.

It is possible to measure a large number of features of an individual very accurately in an attempt to distinguish the obtained data from that obtained for a different individual. However, this leads to problems of non-reproducibility between the data obtained for the same individual on separate occasions. This would result in the genuine individual being rejected.

If a very limited number of features and/or very coarse measurements are utilised then equally data from different individuals may be the same or sufficiently similar to prevent those individuals being distinguished from each other.

It has been found that a position somewhere between these two points can produce a system that, perhaps in combination with some other verification system such as magnetic stripe cards having related personal identification numbers (PINs), provides a practical system of verifying the identity of an individual.

The system of the present invention would allow for the verification of an individual attempting to use a credit card, bank card or similar card without the need for a PIN or signature. However, use of the present invention in combination with, for example, a PIN would provide even greater security.

The present invention has important advantages over other biometric systems in that it is cheap and simple to operate, gives very rapid verification of the individual, and, by use of a camera spaced from the relevant portion of the individual's body, is absolutely non-intrusive (compare with finger printing or a sensor placed in contact with the individual's skin).

CLAIMS

1. Apparatus for identifying an individual comprising means for forming an image of a selected portion of the body of the individual, means for
5 extracting information from said image and means for comparing said information with predetermined information.
2. Apparatus according to claim 1 wherein the information extracted from said image relates to
10 the pattern of subcutaneous blood vessels.
3. Apparatus according to claim 2 wherein said selected portion is a hand and the subcutaneous blood vessels are veins in said hand.
4. Apparatus for measuring a vein pattern of
15 an individual comprising means for forming an image of a selected portion of the body of the individual and means for extracting information from said image.
5. Apparatus according to any one of the preceding claims wherein the means for forming an
20 image comprises camera means spaced from said selected portion.
6. Apparatus according to any one of the preceding claims wherein the means for extracting information converts information in said image into
25 electrical form.
7. Apparatus according to claim 6 wherein the electrical form is digital.
8. Apparatus according to any one of the preceding claims wherein infra-red radiation is used
30 for illuminating said selected portion.
9. Apparatus according to any one of the preceding claims comprising means for locating said selected portion in a predetermined position and orientation whilst the image is being formed.
- 35 10. Apparatus according to any one of the preceding claims comprising a charge-coupled device array for use in forming said image.

11. A method of identifying an individual comprising the steps of forming an image of a selected portion of the body of the individual, extracting information from said image and comparing said
5 information with predetermined information.

12. A method according to claim 11 wherein the information extracted from said image relates to the pattern of subcutaneous blood vessels.

13. A method according to claim 12 wherein
10 said selected portion is a hand and the subcutaneous blood vessels are veins in said hand.

14. A method of measuring a vein pattern of an individual comprising the steps of forming an image of a selected portion of the body of the individual
15 and extracting information from said image.

15. A method according to any one of claims 11 to 14 wherein said image is formed by camera means spaced from said selected portion.



16. A method according to any one of claims
20 11 to 15 wherein said information extracted from said image is converted into electrical form.

17. A method according to claim 16 wherein the electrical form is digital.

18. A method according to any one of claims
25 11 to 17 wherein infra-red radiation is used for illuminating said selected portion.

19. A method according to any one of claims 11 to 18 wherein said selected portion is located in a predetermined position and orientation whilst the
30 image is being formed.

20. A method according to any one of claims 11 to 19 wherein a charge-coupled device array is used in forming said image.

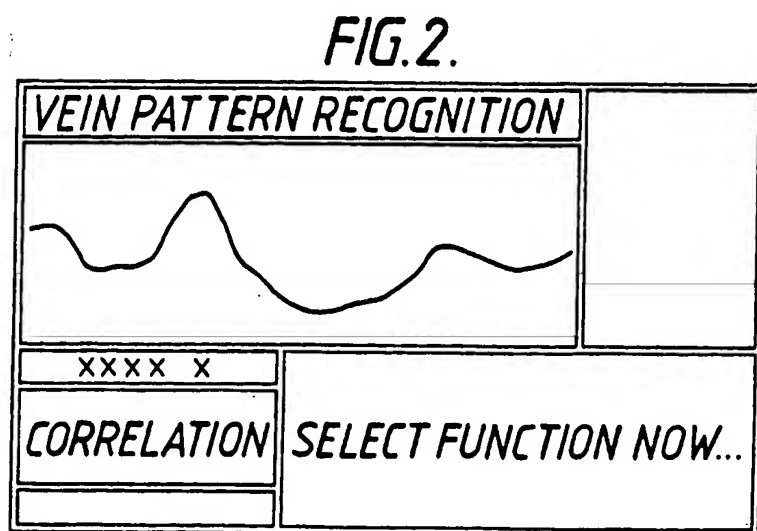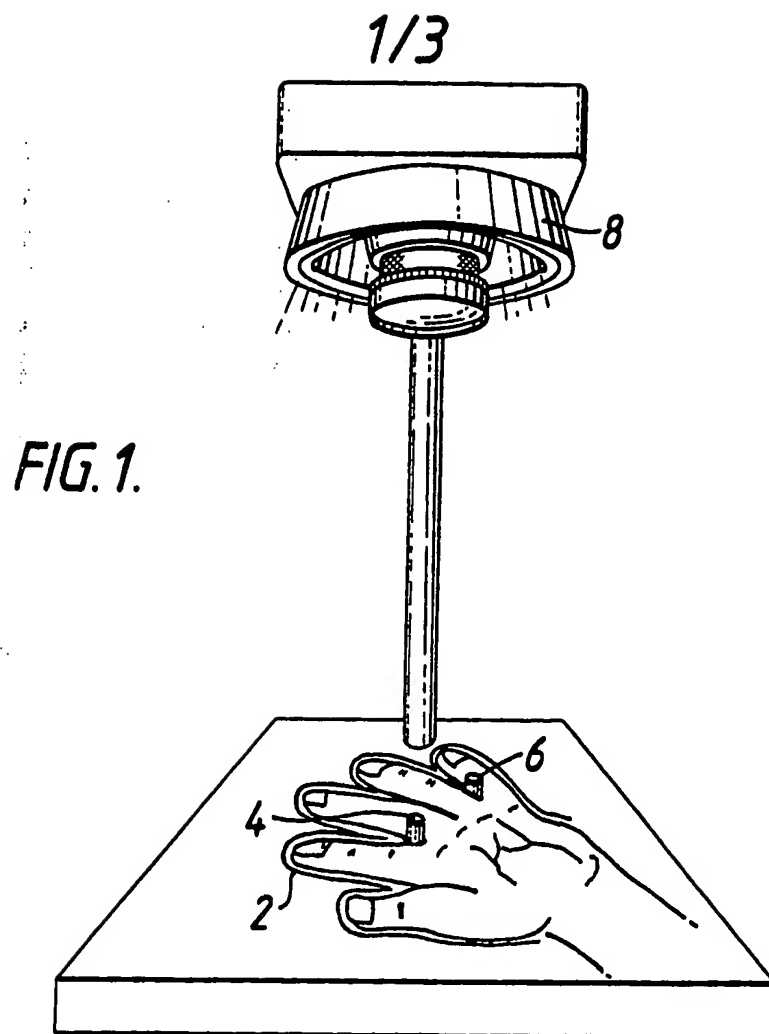

2/3

FIG. 3.



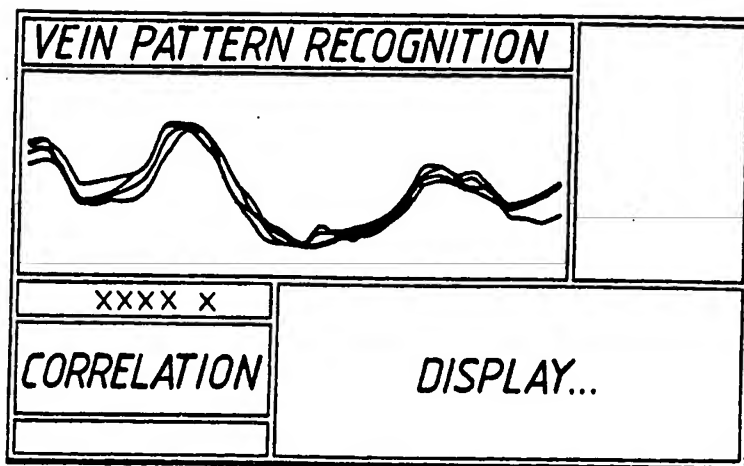


FIG. 4.

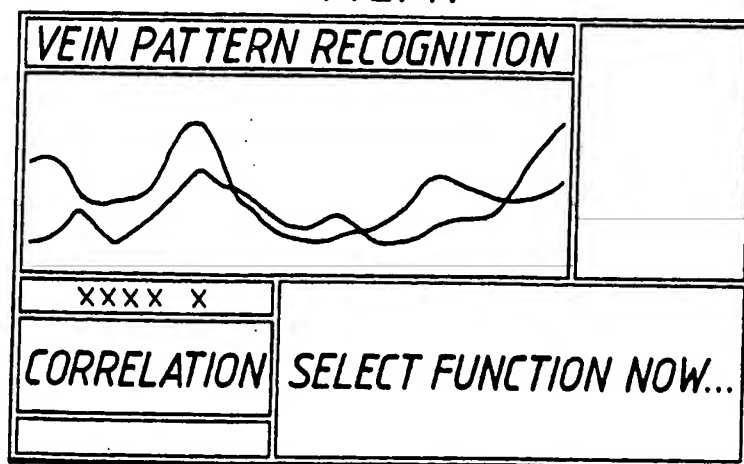

3/3


FIG. 5.

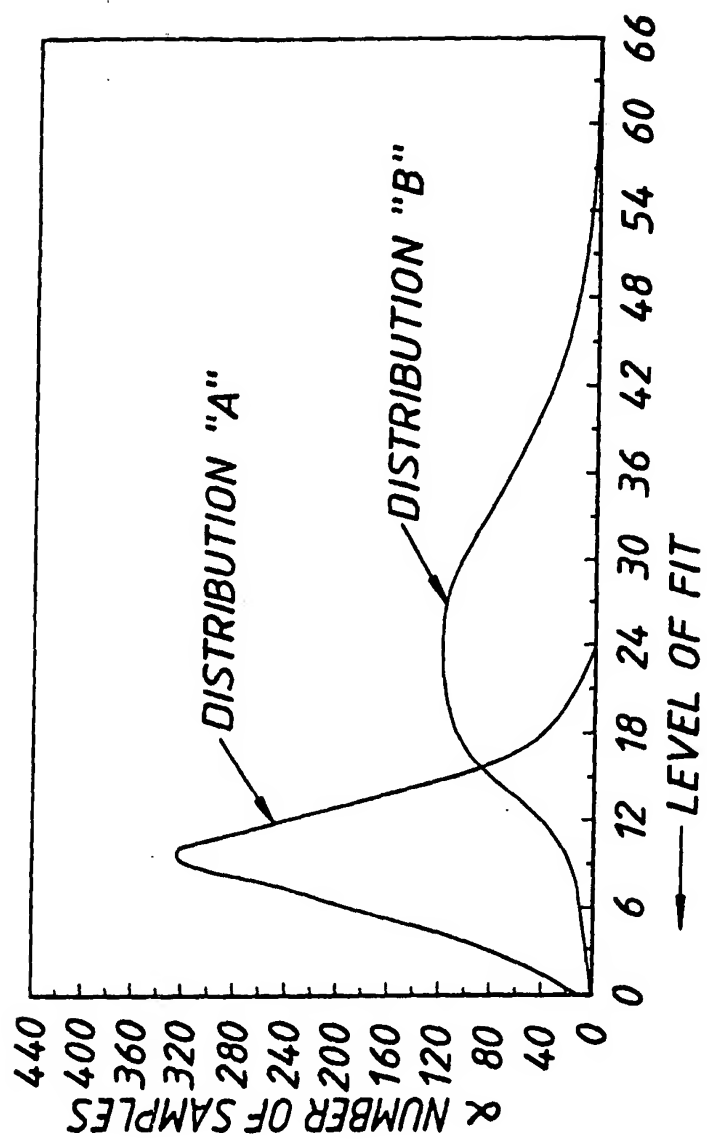

INTERNATIONAL SEARCH REPORT

International Application No PCT/GB 87/00863

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) *		
According to International Patent Classification (IPC) or to both National Classification and IPC		
IPC ⁴ : A 61 B 5/10		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
IPC ⁴	A 61 B; G 07 C	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched *		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁸		
Category *	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
X	GB, A, 2156127 (J. RICE) 2 October 1985 see the whole document	1,2,4,6-8, 11,14,16-18
A	cited in the application	3,13
	--	
X	EP, A, 043988 (PALMGUARD INC.) 20 January 1982 see abstract; page 2, lines 7-20; page 5, line 14 - page 6, line 20; figure 1	1,5-7,9- 11,15-17, 19,20
A		4,14
	--	
X	GB, A, 1593001 (R.B. HILL) 15 July 1981 see page 1; lines 49-67; page 2, line 129 - page 3, line 110; figure 3	1,6,7,9, 11,16,17, 19
A	cited in the application	2,4,5,12, 14,15
	--	
A	US, A, 3581282 (N.G. ALTMAN) 25 May 1971 see abstract; column 2, lines 27-54; figure 1	9,19

<p>* Special categories of cited documents: ¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"A" document member of the same patent family</p>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
4th. March 1988	11 APR 1988	
International Searching Authority	Signature of Authorized Officer	
EUROPEAN PATENT OFFICE	M. VAN MOL 	

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.**

GB 8700863

SA 19597

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 17/03/88. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A- 2156127	02-10-85	WO-A- 8504088	26-09-85
		EP-A- 0210988	25-02-87
		US-A- 4699149	13-10-87
EP-A- 0043988	20-01-82	JP-A- 57052972	29-03-82
		US-A- 4371865	01-02-83
		CA-A- 1167166	08-05-84
		US-A- 4468807	28-08-84
GB-A- 1593001	15-07-81	DE-A- 2801927	24-08-78
		US-A- 4109237	22-08-78
		JP-A- 53105090	12-09-78
		CA-A- 1093695	13-01-81
US-A- 3581282	25-05-71	DE-A- 1960722	18-06-70
		FR-A- 2025134	04-09-70
		GB-A- 1278448	21-06-72